


**Belt Type: 2 Ply C5**

**EP 315/2 3 x 1.5 mm Cover Grade – AS-N C5**

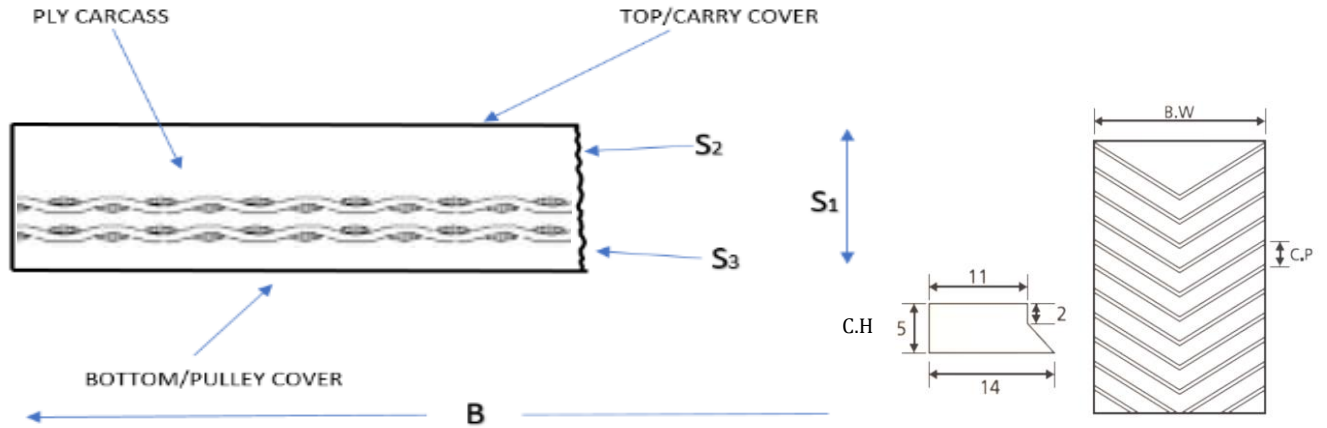

Belt Type: 2 Ply C5 – EP315/2 3 x 1.5 mm Cover Grade – DIN-Y					
	Properties			Dimension	Acc. AS
Belt Dimensions	Width	<b>B</b>	300 ~1200	mm	AS1332
	Thickness of belt	<b>S1</b>	~ 6.9	mm	AS1332
	Thickness of top cover	<b>S2</b>	3	mm	AS1332
	Thickness of bottom cover	<b>S3</b>	1.5	mm	AS1332
	Nominal breaking strength		≥ 300	KN/m	AS1332
Tension Member	PLY Type	<b>EP</b>			
	Number of Plies	2			
Cover	Type of rubber compound	<b>AS-N</b>			
	Tensile strength (min.)	≥17		N/mm <sup>2</sup>	AS1332
	Elongation at break (min.)	≥400		%	AS1332
	Abrasion	≤200		mm <sup>3</sup>	AS1332
	Hardness	65 ± 5		Shore A	AS1332
Cleat Dimensions	Width of cleat	<b>C.W</b>	300-1200	mm	
	Height of cleat	<b>C.H</b>	5	mm	
	Pitch of cleat	<b>C.P</b>	100	mm	

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website: www.allstateconveyors.com

Postal: PO Box 396 Pakenham 3810 | Factory: 2/15 Commercial Drive Dandenong Victoria 3175.