


Belt Type: 3 Ply C15

EP 450/3 3 x 1.5 mm Cover Grade – AS-N C15P380

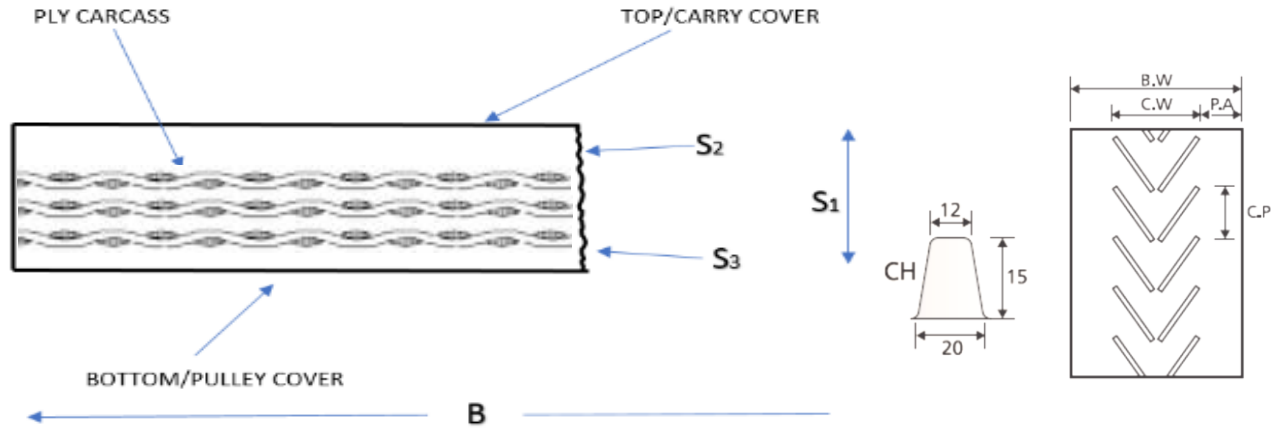

| Belt Type: 3 Ply C15 – EP450/3 3 x 1.5 mm Cover Grade – AS-N C15P380 | | | | | |
|--|----------------------------|-------------|-----------|-------------------|--------|
| | Properties | | Dimension | Acc. AS | |
| Belt Dimensions | Width | B | 450 ~800 | mm | AS1332 |
| | Thickness of belt | S1 | ~ 8.1 | mm | AS1332 |
| | Thickness of top cover | S2 | 3 | mm | AS1332 |
| | Thickness of bottom cover | S3 | 1.5 | mm | AS1332 |
| | Nominal breaking strength | | ≥ 450 | KN/m | AS1332 |
| Tension Member | PLY Type | EP | | | |
| | Number of Plies | 3 | | | |
| Cover | Type of rubber compound | AS-N | | | |
| | Tensile strength (min.) | ≥17 | | N/mm ² | AS1332 |
| | Elongation at break (min.) | ≥400 | | % | AS1332 |
| | Abrasion | ≤200 | | mm ³ | AS1332 |
| | Hardness | 65 ± 5 | | Shore A | AS1332 |
| Cleat Dimensions | Width of cleat | C.W | 380 | mm | |
| | Height of cleat | C.H | 15 | mm | |
| | Pitch of cleat | C.P | 250 | mm | |

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website: www.allstateconveyors.com

Postal: PO Box 396 Pakenham 3810 | Factory: 2/15 Commercial Drive Dandenong Victoria 3175.