


Belt Type: 3 Ply C25

EP 450/3 3 x 1.5 mm Cover Grade – AS-N C25V1000

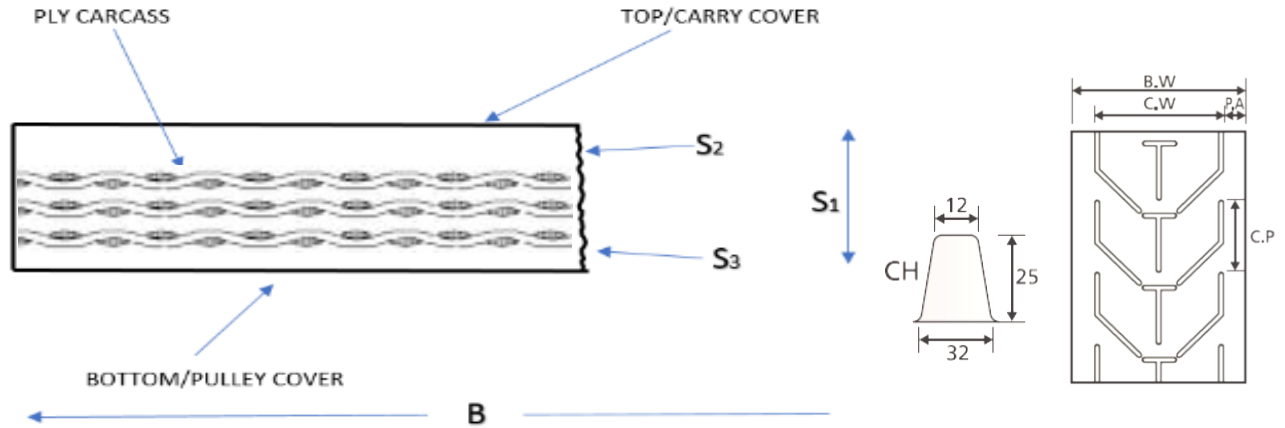

Belt Type: 3 PLY C25 – EP450/3 3 x 1.5 mm Cover Grade – AS-N C25V1000					
	Properties		Dimension	Acc. AS	
Belt Dimensions	Width	B	1200 ~1500	mm	AS1332
	Thickness of belt	S1	~ 8.1	mm	AS1332
	Thickness of top cover	S2	3	mm	AS1332
	Thickness of bottom cover	S3	1.5	mm	AS1332
	Nominal breaking strength		≥ 450	KN/m	AS1332
Tension Member	PLY Type	EP			
	Number of Plies	3			
Cover	Type of rubber compound	AS-N			
	Tensile strength (min.)	≥17		N/mm ²	AS1332
	Elongation at break (min.)	≥400		%	AS1332
	Abrasion	≤200		mm ³	AS1332
	Hardness	65 ± 5		Shore A	AS1332
Cleat Dimensions	Width of cleat	C.W	1000	mm	
	Height of cleat	C.H	25	mm	
	Pitch of cleat	C.P	530	mm	

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website: www.allstateconveyors.com

Postal: PO Box 396 Pakenham 3810 | Factory: 2/15 Commercial Drive Dandenong Victoria 3175.