


Belt Type: 3 Ply 5/1.5 MOR

EP 450/3 5 x 1.5 mm Cover Grade - Mild Oil Resistant

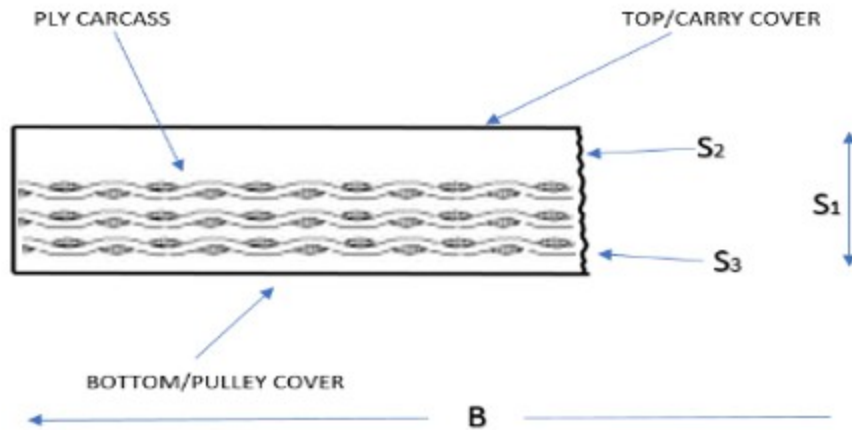

Belt Type: 3 Ply 5/1.5 - EP450/3 5 x 1.5 mm Cover Grade - MOR					
Belt Dimensions	Properties			Dimension	Acc. AS
	Width	B	450 ~2200	mm	AS1332
Thickness of belt	S1	~ 9.7	mm	AS1332	
Thickness of top cover	S2	5	mm	AS1332	
Thickness of bottom cover	S3	1.5	mm	AS1332	
Nominal breaking strength		≥ 450	KN/m	AS1332	
Weight		~ 12.8	KG/m ²	AS1332	
Tension Member	PLY Type	EP			
	Number of Plies	3			
Cover	Type of rubber compound	MOR			
	Tensile strength (min.)	≥10	MPa	AS1332	
	Elongation at break (min.)	≥400	%	AS1332	
	Abrasion	≤200	mm ³	AS1332	
	Hardness	65 ± 5 Shore A		AS1332	
Carcass	Adhesion Cover to Ply	≥4.0	N/mm	AS1332	
	Adhesion Ply to Ply	≥5.5	N/mm	AS1332	
	Elongation at break	≥10	%	AS1332	
	Reference Elongation	≤2,0	%	AS1332	

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website:

www.allstateconveyors.com Postal: PO Box 396 Pakenham 3810 | 38 Nicole Way Dandenong Victoria 3175.