


Belt Type: 3 Ply 5/0 Timber King MOR EP 450/3 5 x 0 mm Cover Grade - Mild Oil Resistant

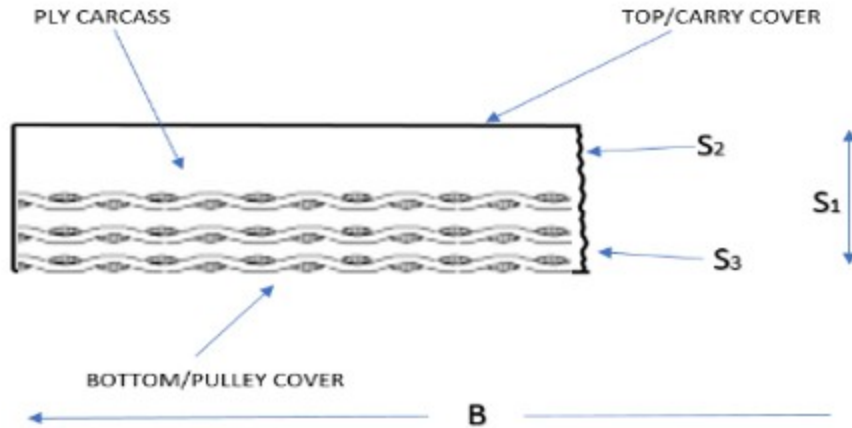

Belt Type: 3 Ply 5/Bare - EP450/3 5 x 0 mm Cover Grade - MOR					
Belt Dimensions	Properties			Dimension	Acc. AS
		Width	B	450 ~2200	mm
	Thickness of belt	S1	~ 8.2	mm	AS1332
	Thickness of top cover	S2	5	mm	AS1332
	Thickness of bottom cover	S3	0	mm	AS1332
	Nominal breaking strength		≥ 450	KN/m	AS1332
	Weight		~ 10.3	KG/m ²	AS1332
Tension Member	PLY Type	EP			
	Number of Plies	3			
Cover	Type of rubber compound	MOR			
	Tensile strength (min.)	≥10		MPa	AS1332
	Elongation at break (min.)	≥400		%	AS1332
	Abrasion	≤200		mm ³	AS1332
	Hardness	65 ± 5	Shore A		AS1332
Carcass	Adhesion Cover to Ply	≥4.0		N/mm	AS1332
	Adhesion Ply to Ply	≥5.5		N/mm	AS1332
	Elongation at break	≥10		%	AS1332
	Reference Elongation	≤2.0		%	AS1332

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website: www.allstateconveyors.com
Postal: PO Box 396 Pakenham 3810 | 38 Nicole Way Dandenong Victoria 3175.