


## Belt Type: 3 Ply 5/1.5 Heavy EP 450/3 5 x 1.5 mm Cover Grade – AS-N

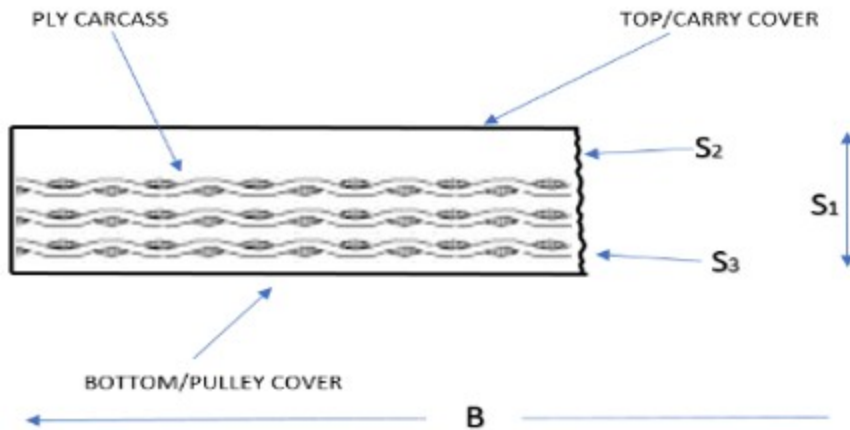

Belt Type: 3 Ply Heavy – EP450/3 5 x 1.5 mm Cover Grade – AS-N					
Belt Dimensions	Properties			Dimension	Acc. AS
		Width	<b>B</b>	450 ~2200	mm
	Thickness of belt	<b>S1</b>	~ 10	mm	AS1332
	Thickness of top cover	<b>S2</b>	5	mm	AS1332
	Thickness of bottom cover	<b>S3</b>	1.5	mm	AS1332
	Nominal breaking strength		≥ 450	KN/m	AS1332
	Weight		~ 12.44	KG/m <sup>2</sup>	AS1332
Tension Member	PLY Type	EP			
	Number of Plies	3			
Cover	Type of rubber compound	AS-N			
	Tensile strength (min.)	≥17		MPa	AS1332
	Elongation at break (min.)	≥400		%	AS1332
	Abrasion	≤200		mm <sup>3</sup>	AS1332
	Hardness	65 ± 5	Shore A		AS1332
Carcass	Adhesion Cover to Ply	≥4.5		N/mm	AS1332
	Adhesion Ply to Ply	≥5.0		N/mm	AS1332
	Elongation at break	≥10		%	AS1332
	Reference Elongation	≤2,0		%	AS1332

NOTE: SOME SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Office: 03 97066339 | Fax: 03 97066445 | Email: enquiries@allstateconveyors.com | Website:

www.allstateconveyors.com Postal: PO Box 396 Pakenham 3810 | 38 Nicole Way Dandenong Victoria 3175.